

Biometrics

RFID

Barcode

QR Code

Qualica-RD CAPELLA 8000

Elegant and sophisticated revolving door designed for access control.

Qualica-RD CAPELLA 8000. This turnstile has a 900 x 900mm sheets (1 piece) and allows for the passage of wheelchairs, baby carriages, etc. It is possible to choose (2 pieces) of 1800mm, which allows the entrance of 3-4 people at the same time.

It incorporates 4 infrared sensors at the top. The post is made of stainless steel and has a diameter of 168mm, it can be installed in any narrow place. The top panel is made of black plexiglass and is surrounded by a black LED light depending on the validity of the passage.

3 years warranty. With standard relay signal, it can be integrated with any type of third party access control system. It is ideal for areas with pedestrian traffic: buildings, public restrooms, libraries, movie theaters, gymnasiums, etc.



QUALICA-RD

CAPELLA 8000 Rotary Turnstile

NEW! It incorporates **3 sensors**.


Features

- Anti-interruption function: The gate automatically locks until it receives the opening signal.
- Automatic restart function: If the user does not pass through within the prescribed time, the system will cancel the current user's authority automatically.
- Fire safety requirements: When power off, the gate will open automatically.
- Generally, it is controlled by button or remote control; the card reader can be installed on the wall.



Technical specifications

Frame material	304 / 316 stainless steel (optional)
Arm material	Transparent Plexiglas (standard) / tempered glass (optional)
Dimensions	168 * 1050 mm
Weight	60kg/pcs
Pitch width	600-900mm (one step)
Pitch direction	Monodirectional and bidirectional
MCBF	5 million
Power supply	AC220V/110V, 50/60Hz
Operating voltage	24V DC
Power consumption	40W
Operating temperature	-15 °C to 60 °C
Operating humidity	0 ~ 95% (no freezing)
Operating environment	Indoor / Outdoor
Flow rate	30 persons per minute
LED indicator	Yes
Infrared sensor	4 sensors
Communication	Communication Dry contact, relay signal, RS485

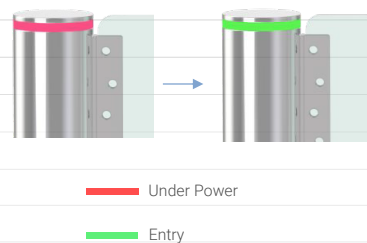

Dimensions (mm)

