



3 years warranty

- Remote Control
- Button contactless
- Card Reader
- QR Code Reader
- Fingerprint Reader
- Facial Reader
- Hand Palm Reader

Qualica-RD **SUN**

Full height turnstile with three lanes for access control.

Qualica-RD SUN QR413 is a high security full height turnstile with 3 rails for pedestrian access. Material is 304 or 316 stainless steel to withstand the harshest conditions. 90° or 120° rotors (optional).

Bidirectional or unidirectional passage. Indoor/outdoor use (IP65 watertightness). Dimensions, color, material and logo can be customized according to the installation environment. Complies with fire safety requirements.

3 years warranty. Easy to install and maintain. Ideal for high security areas such as; embassies, stadiums, prisons, oil field, construction, stations).



SUN QR413 Turnstile Full Height


Features

- Motion with absorbing structure, making the turnstile un very quietly.
- Input direction manually controllable through the lock.
- Trough structure to contain the wiring inside the box.
- Anti-tail function: only one person passes through at a time.
- Support any kind of external device solution and third party access control system.



Technical specifications

| | |
|---------------------------|--|
| Material of the structure | 304 stainless steel |
| Dimensions | 3660 * 1250 * 2300mm |
| Rotors | 90° or 120° rotors (optional) |
| Net weight | 400 kg/unit |
| Pitch width | 3 rails; 690mm + 690mm + 666mm |
| Pitch direction | Unidirectional / Bidirectional |
| MCBF | 10 million |
| Power supply | AC220V/110V, 50/60Hz |
| Operating voltage | 24V DC |
| Power consumption | 40W |
| Operating temperature | -15 °C to 60 °C |
| Operating humidity | 0 ~ 95% (no freezing) |
| Operating environment | Indoor / Outdoor |
| Flow rate | 35 persons per minute |
| LED indicator | Yes (two indicators on top) |
| Emergency | Automatic opening of the arm when power is cut off |
| Communication | Dry contact, relay signal, RS485 |

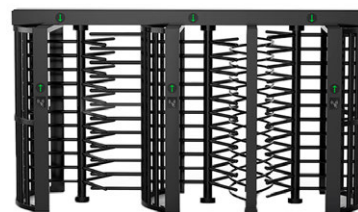

Black color (optional)

Dimensions (mm)

