

Qualica-RD 6004C

cSteel security gate (motor with clutch + reader + signage)

Qualica-RD 6004C This door can be used stand-alone or in combination with a full-height turnstile. It has a standard relay signal for compatibility with various third party access control systems.

The color and dimensions are customizable to your needs. Logo is also customizable. Easy to install and maintain.

3 years warranty. This combination is the most common and ideal solution for managing access for package deliveries, carts and people with reduced mobility.

Qualica-RD 6004C - Steel security door with motor



Card Reader



Barcode and QR reader



Remote control



No contact



Fingerprint



Face




Palm of hands

Technical specifications

Frame material	304 stainless steel
Dimensions	1200 * 260 * 2300 mm
Inside height	2080 mm
Clearance width	900 mm
Direction of passage	Unidirectional and Bidirectional
Opening direction	Two way
Net weight	65kg/unit
MCBF	10 million
Power supply	AC220V/110V, 50/60Hz
Operating voltage	24V DC
Power consumption	40W
Operating temperature	-15 °C - 60 °C
Operating humidity	0 ~ 95% (no freezing)
Operating environment	Indoor / Outdoor (IP65 watertightness level)
Flow rate	30 persons per minute
LED indicator	green -> input, red x no input
Communication	Dry contact, relay signal, RS485
Flexibility	Integration with any access control



Dimensions (mm)

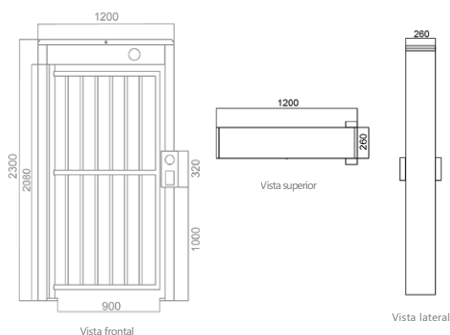

Color options

