

## Qualica-RD ANDROMEDA 50D

Double rail tripod for access control in confined spaces.

**Qualica-RD ANDROMEDA 50D** is a double rotating arm tripod with a 550mm passage width per rail, allowing the passage of only one person at a time. Bidirectional or unidirectional operation.

Black and white design is elegant for use in high-end applications. Logo, appearance color and dimensions can be customized depending on the installation environment. Ideal for both outdoor and indoor use.

**3-year warranty.** Easy to install and maintain. Low noise level. Low energy consumption. Waterproof IP65 watertightness level.



## ANDROMEDA50D Tripod









**Cards Solution** 


QR/Barre Code Solution

Biometric Solution

## Technical specifications

Certifications	Conformity CE, ROHS, FCC
Frame Material	Steel / Black and white baked-on varnish / Tempered glass
Arm Material	Stainless steel
Overall Dimensions	470 * 400 * 1000mm
Net Weight	60kg/unit
Pitch Width	550mm + 550mm
Pitch Direction	Unidirectional and Bidirectional
MCBF	10 million
Power Supply	AC220V/110V, 50/60Hz
Operating Voltage	24V DC
Power Consumption	40W
Operating Temperature	-20 °C - 75 °C
Operating Humidity	0 ~ 95% (No freezing)
Operating Environment	Indoor / Outdoor
Flow Rate	35+35 persons per minute
LED Indicator	Two LED indicators on top
Communication	Dry contact, relay signal, RS485
Emergency	Arms lower automatically
Flexibility	Integrates with any access control

## Dimensions (mm)

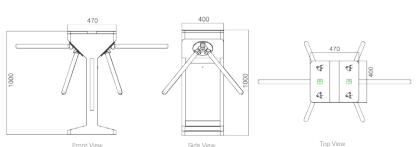



Only one person passes at a time

